


# a

## emotional light

coral collection

LED

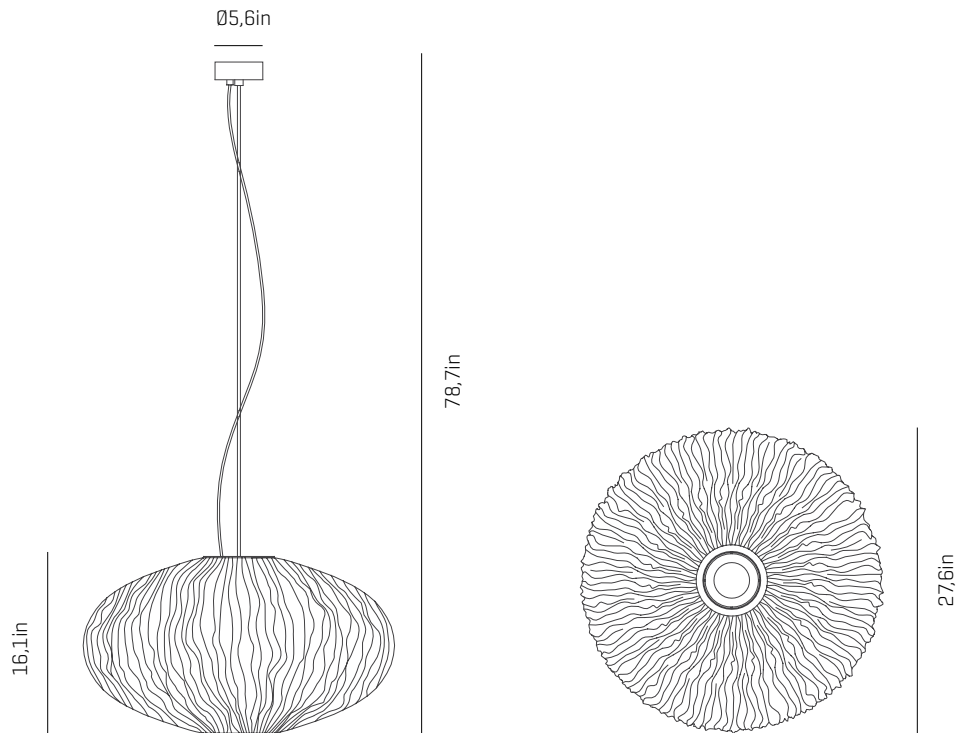

USA & Canada


ref. COAU04G-LD



### MATERIALS & COMPONENTS

#### LAMPSHADE

Painted stainless steel | One color to choose



BL

BE

G

T

CUSTOM  
COLOR

Stainless steel

Bottom diffuser

#### CANOPY AND CABLE

Steel gloss nickel-plated

Transparent or black cable

Standard: 78,7in

Length customizable

#### LIGHT SOURCE BUILT IN

##### 120V - 60Hz

35W 2700K 3938lm built-in  
upon request 3000K 4086lm

Dimming system: 0-10V

### OTHER DATA

#### NET WEIGHT

9,9lb

#### PACKAGING

71x 71x 42in

17,6lb

#### ELECTRICAL FEATURES



#### CERTIFICATIONS



## Coral Seurchin

ref. COAU04G-LD


Suitable for indoor use, at 77°F

Convient pour une utilisation en intérieur à une température ambiante de 77°F

Apta para uso interior a temperatura ambiente de 77°F

Box contains | Contenu de la boîte | Contenido de la caja:

- A** - Lampshade | Abat jour | Tulipa [1]
- B** - Holding piece | Pièce de fixation | Pieza de sujeción [1]
- C** - Security screws | Vis de sécurité | Tornillos de seguridad [2]
- D** - Wall Plugs | Prise murale | Tacos [2]
- E** - Canopy | Rosace | Florón [1]
- F** - Screws | Vis | Tornillos [2]




LED

0-10V  
PHASE CONTROL

SAFETY NOTE: Switch off mains supply before commencing installation

INFORMATION DE SÉCURITÉ: Debranchez l'alimentation avant de commencer l'installation

INDICACIÓN DE SEGURIDAD: Desconecte la alimentación eléctrica antes de empezar la instalación

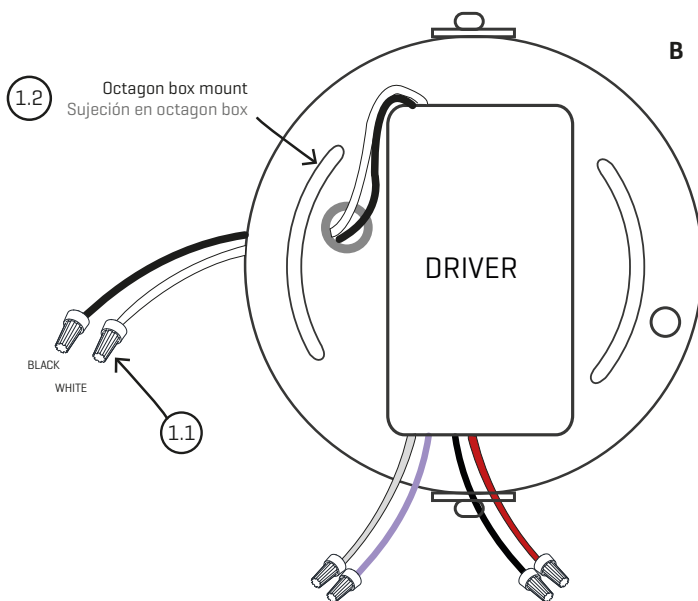

## 1

Schematic of the fixing system:

- ①.1 Electrical connection
- ①.2 Drills fixed to the octagon box

1.1 Pass the electric cables to the interior and do the electric connection inside the octagon box.

Schéma du système de fixation:

- ①.1 connexions électriques
- ①.2 Trous de fixation au support électrique

1.1 Passez les câbles électriques à l'intérieur et effectuez le raccordement électrique.

Esquema del sistema de fijación:

- ①.1 Conexión eléctrica
- ①.2 Taladros fijación a soporte eléctrico

1.1 Pase el cable eléctrico y realice la conexión eléctrica en el interior de la caja de conexiones.

COMPATIBLE PHASE-CUT DIMMERS


LUTRON: S-603PG / DVELV-303P / CT-103P / SELV-300P / DVCL-153P / MAELV-600 / DV-600P  
 LUTRON: FAELV-500 / TGCL-153PTG-600P / S-600P / LG-600P  
 LEVITON: IPI06-1LZ / 6631-2 / 6683-IW / IP04 / 6161 / 6633-P / VPE06  
 COOPER: SLC03P / DLC03P / DAL06P  
 LIGHTOLIER: ZP260QEW

COMPATIBLE 0-10V DIMMERS

LUTRON: NOVA SERIES (part number NFTV)  
 LUTRON: DIVA SERIES (PART NUMBER DVTV)  
 LEVITON: ILLAMTECH SERIES (PART NUMBER IP710-DL)



**CABLE PURPLE AND GREY**  
0-10V ONLY  
DO NOT CONNECT  
TO AC POWER LINE  
(will void warranty)

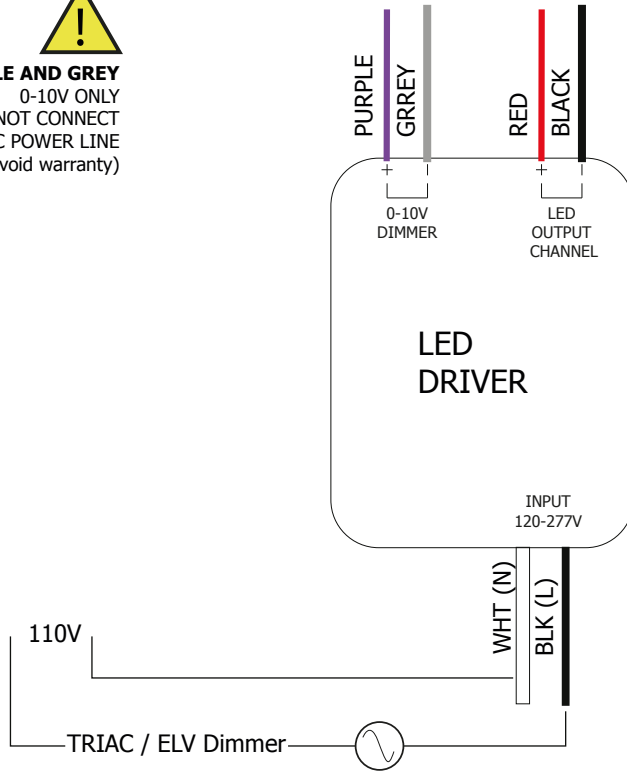


2

TRIAC / ELV regulation diagram

Schéma de régulation TRIAC / ELV  
Diagrama para la regulación TRIAC / ELV



**CABLE PURPLE AND GREY**  
0-10V ONLY

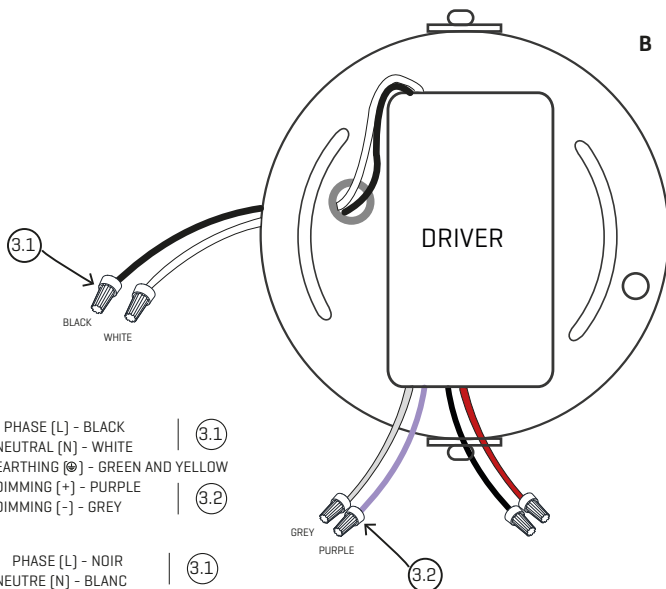

COLOR CODE: PHASE [L] - BLACK | (3.1)  
NEUTRAL [N] - WHITE  
EARTHING [⊕] - GREEN AND YELLOW  
DIMMING [+] - PURPLE | (3.2)  
DIMMING [-] - GREY

CODE COULEUR: PHASE [L] - NOIR | (3.1)  
NEUTRE [N] - BLANC  
TERRE [⊕] - VERT ET JAUNE  
DIMMING [+] - PURPLE | (3.2)  
DIMMING [-] - GRIS

CÓDIGO DE COLORES: FASE [L] - NEGRO | (3.1)  
NEUTRO [N] - BLANCO  
TOMA TIERRA [⊕] - VERDE Y AMARILLO  
DIMMING [+] - VIOLETA | (3.2)  
DIMMING [-] - GRIS

3

### ONLY DIMMING 0-10V

This driver is compatible with 0-10V regulators. To do this, you must connect the gray [-] and violet cables, respecting the indicated color code.

Do not touch these cables [4.2] if you do not have a 0-10V dimmer.

### UNIQUEMENT RÉGLEMENTATION 0-10V

Ce pilote est compatible avec les régulateurs 0-10V.



Pour ce faire, vous devez connecter les câbles gris [-] et violet en respectant le code couleur indiqué.

Ne touchez pas ces câbles [4.2] si vous n'avez pas de régulateur 0-10V.

### SOLAMENTE REGULACIÓN 0-10V

Este driver es compatible con reguladores 0-10V. Para ello debe conectar los cables gris [-] y violeta tal respetando el código de colores indicado.


No toque estos cables [4.2] en caso de no disponer regulador 0-10V.

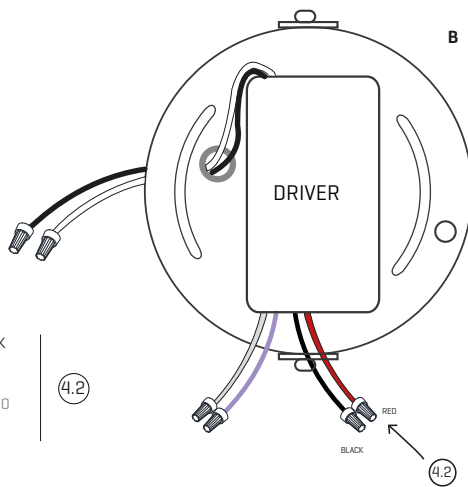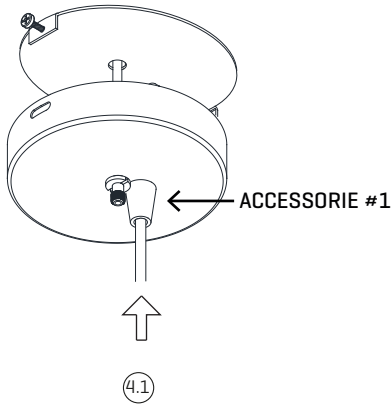

COLOR CODE: NEGATIVE (-) - BLACK  
POSITIVE (+) - RED

CÓDIGO DE COLORES: NEGATIVO (-) - NEGRO  
POSITIVO (+) - ROJO

4.2

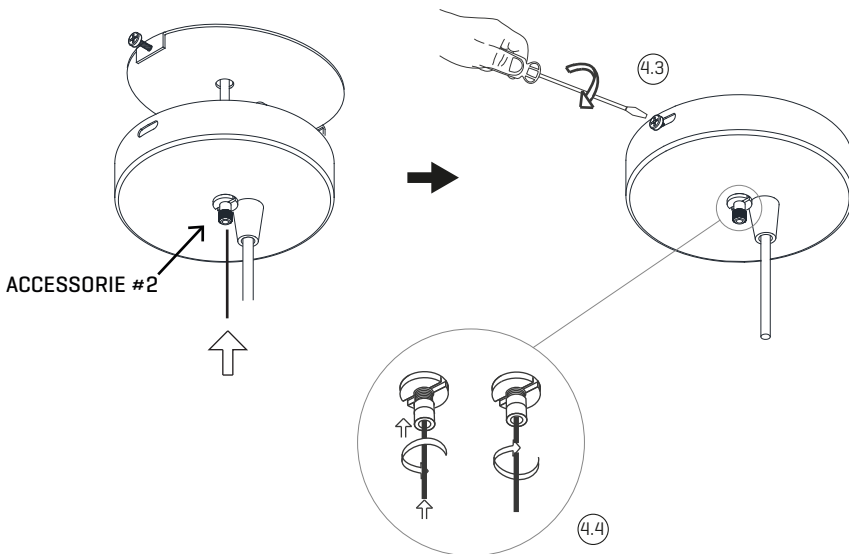

### 4

Pass the electrical cable of the luminaire through the strain relief [4.1] of the canopy and connect it to the black and red cables of the driver [4.2], respecting the color code.  
Insert the canopy in the holding piece and tighten the security screws [4.3].  
Tighten the strain relief situated on the canopy.

Passer le câble électrique du luminaire à travers l'anti-traction de la rosace [4.1] et le connecter aux câbles noir et rouge du driver [4.2], en respectant le code couleur.  
Insérer le baldaquin dans la pièce de serrage et serrer les vis de sécurité [4.3].  
Serrer le tendeur de câble situé sur le capot.

Pase el cable eléctrico de la luminaria por el antitirón del florón [4.1] y conectelo en los cables negro y rojo del driver [4.2], respetando el código de colores.  
Encajar el florón en la pieza de sujeción y apretar los tornillos de seguridad [4.3].  
Apretar el tensor del cable situado en el florón.