


a·emotional light

Umбра Line

Isaac Piñeiro, 2025

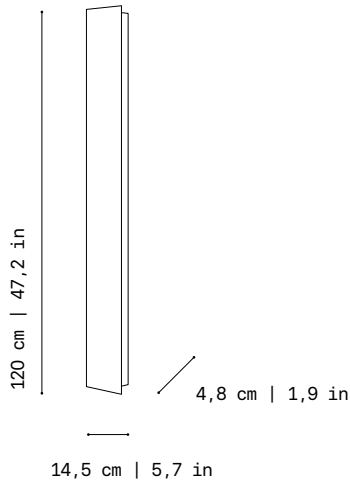

REF: ULI06L

N New collection

Wall lamp
Aplique

Lampshade
Tulipa

Satin stainless steel
Acero inoxidable satinado

One color to choose
Un color a elegir

Finishes
Acabados

BC Warm white
Blanco cálido

Support
Soporte

Painted steel
Acero pintado

MOUNTING OPTIONS
OPCIONES DE INSTALACIÓN

Light source
Fuente de luz

230 V - 50 Hz

□□□□ 14W 2700K 950lm built in
Dimming system: PHASE CUT

100-277 V - 60 Hz

□□□□ 14W 2700K 950lm built in
Dimming system: TRIAC

Net weight
Peso neto

4,8kg | 10,6 lb

Packaging
Embalaje

130x20x20 cm | 6 kg
51,2x8x8 in | 13,2 lb

Electrical features
Características eléctricas



Certifications
Certificaciones



Other references
Otras referencias



ULI06S



ULI06M




ULI06L

a·emotional light

Umбра Line

Isaac Piñeiro, 2025

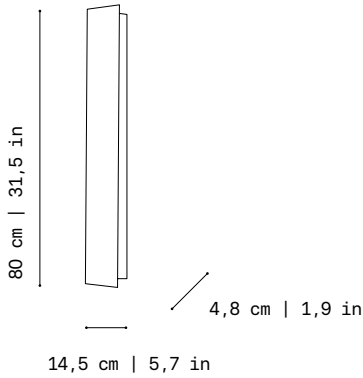

REF: ULI06M

N New collection

Wall lamp
Aplique

Lampshade
Tulipa

Satin stainless steel
Acero inoxidable satinado

One color to choose
Un color a elegir

Finishes
Acabados

BC Warm white
Blanco cálido

Support
Soporte

Painted steel
Acero pintado

Light source
Fuente de luz

MOUNTING OPTIONS
OPCIONES DE INSTALACIÓN

230 V - 50 Hz

□□□□ 14W 2700K 950lm built in
Dimming system: PHASE CUT

100-277 V - 60 Hz

□□□□ 14W 2700K 950lm built in
Dimming system: TRIAC

Net weight
Peso neto

5,6kg | 12,3 lb

Packaging
Embalaje

90x20x12 cm | 3,3 kg
35,4x8x4,7 in | 7,3 lb

Electrical features
Características eléctricas



Certifications
Certificaciones



Other references
Otras referencias



ULI06S



ULI06M




ULI06L

a·emotional light

Umбра Line

Isaac Piñeiro, 2025

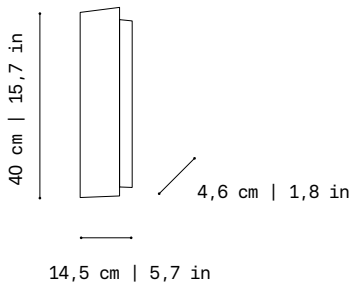

REF: ULI06S

N New collection

Wall lamp
Aplique

Lampshade
Tulipa

Satin stainless steel
Acero inoxidable satinado

One color to choose
Un color a elegir

Finishes
Acabados

BC Warm white
Blanco cálido

Support
Soporte

Painted steel
Acero pintado

Light source
Fuente de luz

MOUNTING OPTIONS
OPCIONES DE INSTALACIÓN

230 V - 50 Hz

□□□□ 6W 2700K 400lm built in
Dimming system: PHASE CUT

100-277 V - 60 Hz

□□□□ 6W 2700K 400lm built in
Dimming system: TRIAC

Net weight
Peso neto

1,4kg | 3,1 lb

Packaging
Embalaje

50x20x12 cm | 2,1 kg
19,7x8x4,7 in | 4,6 lb

Electrical features
Características eléctricas



Certifications
Certificaciones



Other references
Otras referencias



ULI06S



ULI06M



ULI06L